



Product Parameter	Parameter Description
Size	185Lx41.8Wx22.4H(mm)
Armature Plate Dimension	130Lx33Wx9.3H(mm)
Holding Force	180kg(350Lbs)
Input Voltage	12 or 24VDC
Current	12V/400mA or 24V/200mA
LED	Red shows locked ; Green shows unlocked
Signal Output	Lock signal(NO/NC/COM)
Suitable	Wooden door , Glass door ,Metal door , Fireproof door
Weight	1.2KG

Collinear Load Test 180kg,350pounds.

Dual Voltage 12 or 24 VDC(optional).

The Standard Voltage is 12VDC when Finished.

MOV Provides Reverse Current Protection.

Suitable For Wooden Door,Glass Door,Metal Door,Fireproof Door.

LED Indicates the door Status.

Lock Status sensor(NO/NC/COM)

Anti-Residual Magnetism Designed.

High Strength Material,Anodized Aluminum Housing.

Design without Mechanical Failure.

Increase the holding Force,Dual Insulative Housing.


CE Certificate by European Union,MA Certificate by China Public Security Office.



YLI ELECTRONIC

## ELECTROMAGNETIC LOCK SERIES

YM-180N(LED) Electromagnetic lock with LED

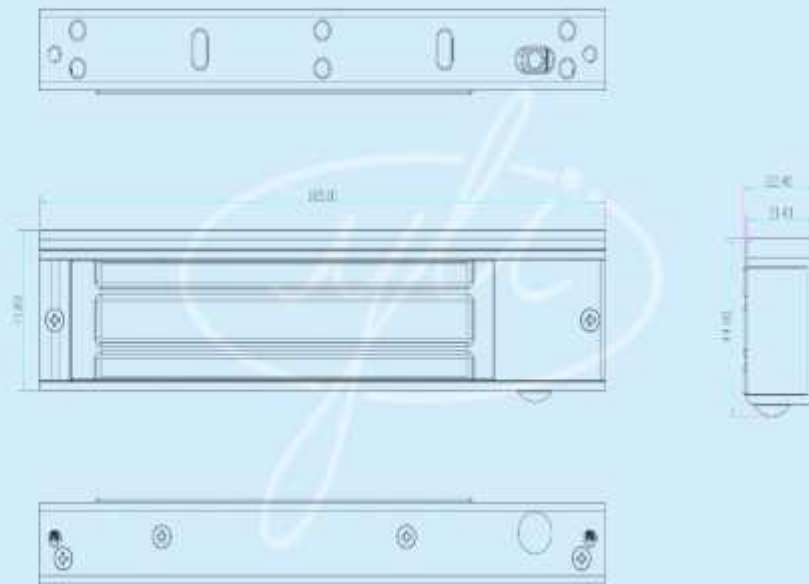

### Shenzhen YLI Electric Lock Co.,Ltd.

Address: Room 1605, Block A, Haisong Building, Tairan 9th Road,  
Futian District, Shenzhen  
Tel: 0755-83489801/02/03/05/06 Fax: 0755-83489807  
E-mail: yli@yli.cn Zip Code: 518040 Http://www.yli.cn

YLI Products sell well in more than 100 countries and regions

